

Ventilation Vents

Kensington

Stainless Steel Eave Vent With Mesh


EVSS100, EVSS125, EVSS150 & EVSS200B

The EVSS range are ideal for under eave ventilation, featuring a flush face. The open mesh makes them suitable for wall or ceilings as an inlet/outlet vent.

The Eave is made from quality 316 Marine Grade Stainless Steel. The Eave also **complies with BAL40 (Bushfire Attack Level)**, as the vent is supplied with a cinder mesh insert.



The diameter of the mesh wire is 0.2mm and has 16 holes per square centimetre

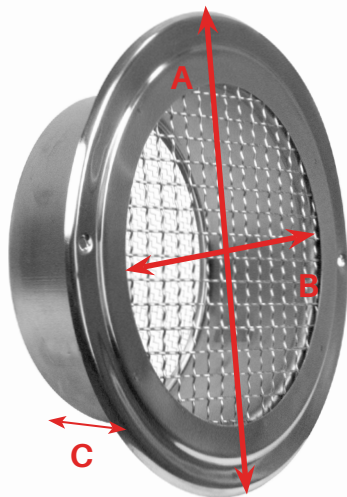

Key Benefits

- Egg-crate style grille to prevent pests and vermin from entering the system
- Screws and rubber seal included
- Complies to BAL40 (Bushfire Attack Level 40) when used with supplied cinder mesh insert

Dimensions (mm)

Model No.	A	B	C
EVSS100	140	100	52
EVSS125	175	125	52
EVSS150	200	150	62
EVSS200B	250	200	72

Specification

Model No.	Description	Colour
EVSS100	SS Eave Vent - 100mm	Silver
EVSS125	SS Eave Vent - 125mm	Silver
EVSS150	SS Eave Vent - 150mm	Silver
EVSS200B*	SS Eave Vent - 200mm	Silver

*The EVSS200B is constructed from 304-Grade Stainless Steel

PLEASE NOTE: BEING STAINLESS STEEL CONSTRUCTED OUR VENTS COMPLY TO BAL40 (BUSH ATTACK LEVEL 40) WHEN USED WITH SUPPLIED CINDER MESH INSERT. IT IS RECOMMENDED THAT A QUALIFIED TRADESPERSON IS USED TO INSTALL THE EAVE VENT AND ANY THROUGH THE WALL OR UNDER EAVE VENTILATION.

Ventilation Vents

If you have any more enquires regarding this item please email us at sales@ventilation-vents.com.au