

# Ventilation Vents


Kensington

## Stainless Steel Hood Vent With Mesh

HVSS100, HVSS125 & HVSS150

The HVSS features an internal gravity flap allowing air to be expelled, whilst stopping cold air and pests entering the system.

The Hood is made from quality 316 Marine Grade Stainless Steel. The Hood also **complies with BAL40 (Bushfire Attack Level)**, as the vent is supplied with a cinder mesh insert.

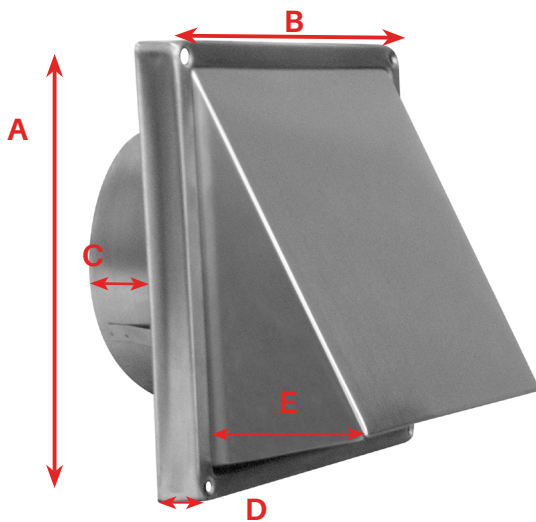

The diameter of the mesh wire is 0.2mm and has 16 holes per square centimetre



### Key Benefits

- Angle design for snow and heavy rain regions
- Screws and rubber seal included
- Suitable for through the wall ventilation only
- Complies to BAL40 (Bushfire Attack Level 40) when used with supplied cinder mesh insert

### Dimensions (mm)

Model No.	A	B	C	D	E
HVSS100	150	150	52	15	55
HVSS125	180	180	52	20	70
HVSS150	180	180	62	20	70

### Specification

Model No.	Description	Colour
HVSS100	SS Hood Vent - 100mm	Silver
HVSS125	SS Hood Vent - 125mm	Silver
HVSS150	SS Hood Vent - 150mm	Silver

**PLEASE NOTE: BEING STAINLESS STEEL CONSTRUCTED OUR VENTS COMPLY TO BAL40 (BUSH ATTACK LEVEL 40) WHEN USED WITH SUPPLIED CINDER MESH INSERT. IT IS RECOMMENDED THAT A QUALIFIED TRADESPERSON IS USED TO INSTALL THE HOOD VENT AND ANY THROUGH THE WALL VENTILATION.**

Ventilation Vents

If you have any more enquires regarding this item please email us at [sales@ventilation-vents.com.au](mailto:sales@ventilation-vents.com.au)